Journal of Emerging Trends in Engineering and Applied Sciences (JETEAS) 4(4): 572-575
© Scholarlink Research Institute Journals, 2013 (ISSN: 2141-7016)
jeteas.scholarlinkresearch.org

# GPR Applications in the Detection of Underground Drainage Culvert Research

**[1]Ming-Chih Lin, [2]Yu-Ming Kang, [3]Kun-Fa Lee**

[1] Doctorate Student, Department of Civil Engineering Feng Chia University
[2] Professor, Department of Civil Engineering Feng Chia University.
[3]Researcher, Exploration & Production Research Institute CPC Corporation, Taiwan.
**Corresponding Author: Kun-Fa Lee**

**Abstract**
The applicable fields of NDT (Non-Destructive Testing) are extensive nowadays and among these fields, underground geological structures provide significant value for study and engineering application. In particular, it is crucial to understand the geological status (e.g. underground water level, cavities, tilting, weathering, etc) of an area prior to many developments. Otherwise, additional losses will be generated during development. More seriously, the geology of specific area might be influenced and damaged. This case research used the case of ground penetrating radar under NDT for on site culvert to discuss the significance of GPR (Ground Penetrating Radar) in regard to the underground drainage culverts, the cavity. After experimentation, it was verified that GPR was capable of testing underground drainage culverts. The drainage culverts was approximately 1.2 cubic meter size and 0.9 m deep from ground surface. With such result, it can be observed that ground penetrating radar is a useful tool for testing, and can provide reference for future researches and engineering applications.

**Keywords:** GPR (Ground Penetrating Radar), NDT (Non-Destructive Testing), culvert, cavity, tilting.

## INTRODUCTION

The collision between the Eurasian Continent and Philippine plate (as shown in Figure 1) caused the complex underground geological structure of Taiwan and such structure is a great challenge in the study of geotechnical engineering. At present, studies in this field include: seismic testing, drilling, geo-electricity, etc. However, it is often difficult to decide whether or not to commence the studies since the landscape and object often cause problems in regard to site damage and huge funds required. If a technology with non-destructive, fast and high resolution features can be used to survey the status of underground geological structures, various technical bottlenecks experienced in the past can surely be solved.

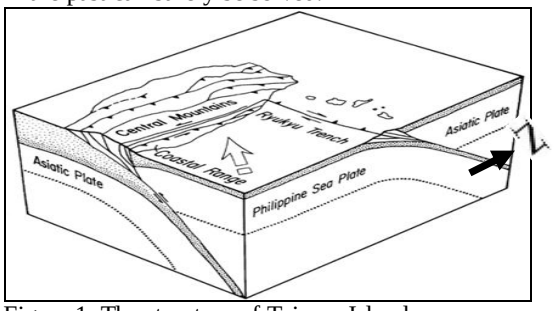

Figure 1 The structure of Taiwan Island

The GPR applies the principle of detecting a target object with radar wave reflection that generates 16MHz to 2Gz of radar wave for the duration of a nano-second (ns) via a power discharge coil of several hundred volts. The wave penetrates underground or building structures and then such incident wave is reflected to the ground surface via the underground stratum interface of different electromagnetism, where highly sensitive antenna will receive partial signals and automatically store them. The recording time is determined according to detecting target for a minimum of 1 ns and maximum of 32,767 ns. After general processes, such as compensation for declined amplitude and filter plus special processes including speed analysis, de-convolution and displacement, the data recorded generates a double wave section and this is used to plot the profile of the underground stratum and detect artificial objects buried underground. Figure 2 is an illustration of a GPR survey. When moving along the ground, the GPR transmits a wave to penetrate the stratum and reach the interface below ground surface. The reflected wave generated is picked up by reception antenna when it returns to the ground surface.

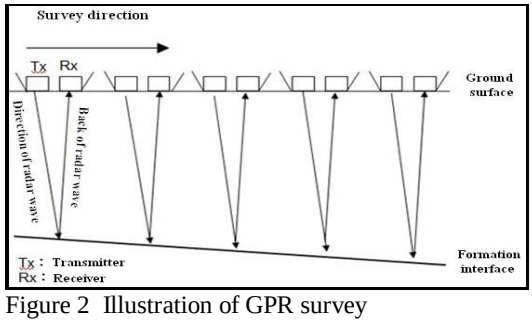

Figure 2 Illustration of GPR survey

The SIR-3000 machine (Figure 3) and 400MHz antenna (Figure 4) were used as the GPR equipment in the case.

Figure 3 GSSI SIR-3000 machine

Figure 4 400MHz antenna

## LITERATURE REVIEW

The application of NDT in the engineering industry is very extensive. Taking the drainage culverts test in underground structure for example, many experts and scholars have produced discussions and studies. Davis and Annan (1989) explored the underground stratum structure or fault. In the studies made by Kovas (1991) and Mellet (1992), the results indicated positive opinions on determining the location of unknown objects underground with GPR. Zolotarev et al. (1996) made the cavity survey. When Tung and Huang (1994) used GPR to survey the structure of shallow stratum, the results of interpretation were very easily affected by noise. After filter processing of the horizontal noises, the stratum status was able to be expressed more clearly. Lee et al. (1999) applied GPR to survey the parallel piping and underground holes, and concluded that the position and size of holes could be determined according to the crest of the double curve and abnormally smooth section near the crest from radar's sectional image. Tung et al. (2002) applied the geotechnical engineering NDT to survey underground structure and environment. Li et al. (2003) used a practical case to discuss the application of GPR data interpretation for detecting an underground cavity, where the study results could be used as reference for future studies on liquefaction and the hollowing of underground stratum. Chen (2003) adopted GPR for the simulation of cavity detecting, where the size of the cavity inside the hydraulic embankment could be evaluated rapidly from the interpretation results. Wu and Chang (2007) used GPR to test the underground status of roads and confirmed whether or not, the stratum under the road was hollowed, thereby providing a basis for evaluating road safety. From the above literatures, it is known that the use of GPR to survey the status of underground structure has become a popular procedure.

## DATA COLLECTION

In this study, the gutter cavity on the campus of National Central University (Picture 1) was used for an experiment on surveying an underground drainage culverts with GPR, so that the interpretation and verification could proceed.

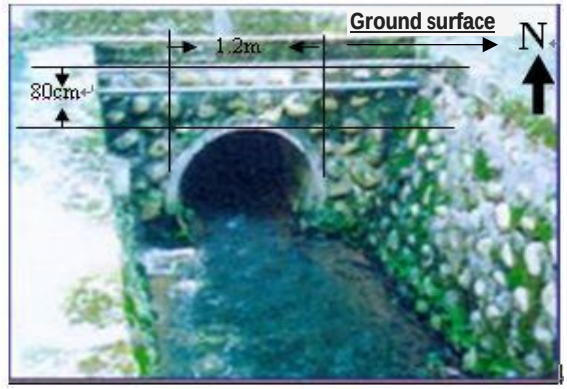


Picture 1. Current status of underground drainage culverts

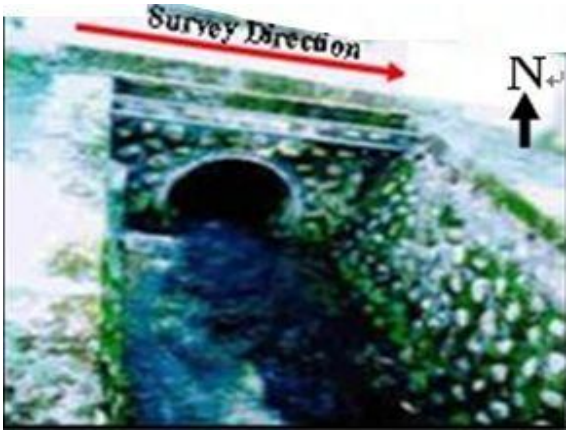


Picture 2. Illustration of GPR Detect on site

## ANALYSIS AND INTERPRETATION

(1) Based on the original section (Figure 5) obtained from GPR detect (Picture 2), the position and depth of the drainage culverts could be observed, which indicated that GPR was a fast detecting instrument with high resolution.

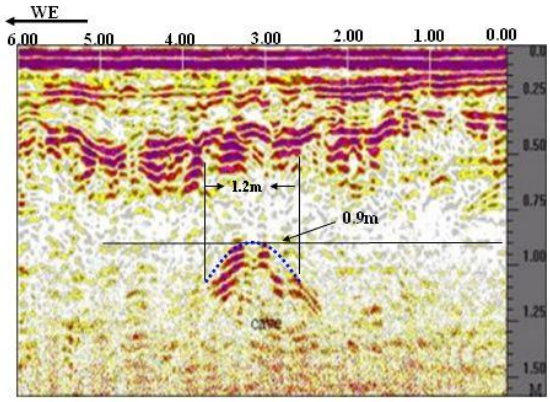


Figure 5 Original section of GPR

(2) After processing the original section with filter, the position for the 3m offset 1.0m width and 0.9m depth of the cavity could be seen even more clearly (Figure 6).

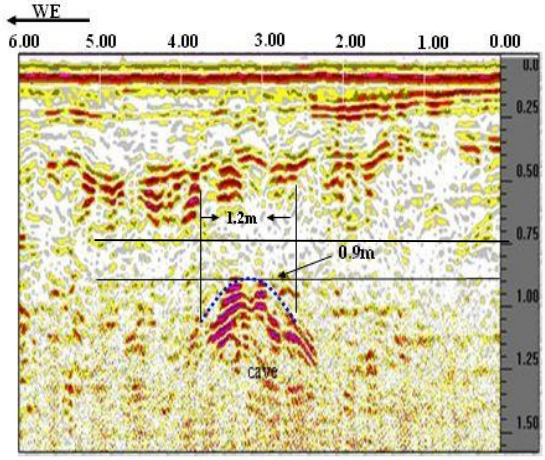


Figure 6 Section after filter process

(3) After processing the filtered section with gain, the position, 1.2 m size and 0.9 m depth of the cavity were highlighted (Figure 7).

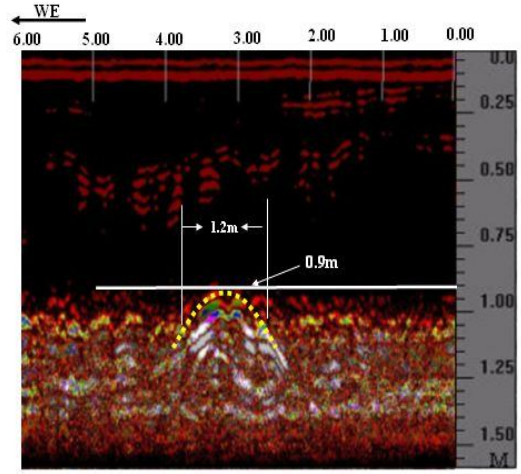


Figure 7 Gain process

(4) By processing with different colors, the drainage culverts could be interpreted with another section (Figure 8).

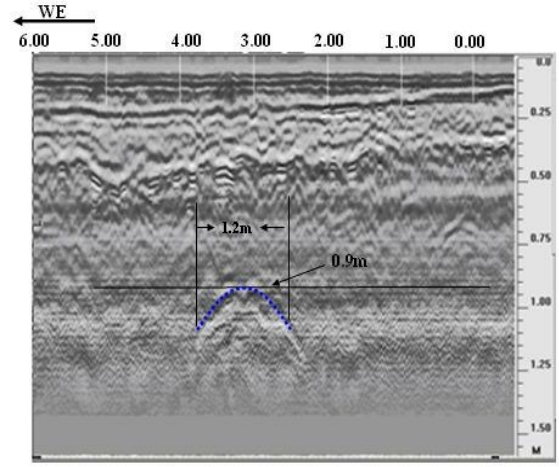


Figure 8 Section processed with different color

From Figures 6, 7 and 8 of the processing section derived from testing with filter, gain and color, the position, size and depth of the drainage culverts could be identified more clearly.

After interpretation on the section, the correct position of the drainage culverts was approximately 0.9m deep, with the size of 1cubic meter, which could be used as reference for future studies with GPR.

## CONCLUSION

Results from this case that, in the detection of ground penetrating radar to correctly measure the culvert ditch correct position, culverts depth of approximately 0.9 m and size 1.2 cubic meter.

Therefore, non-destructive penetrating radar can be applied to detect other underground structures and geotechnical applications to be used as reference for future research.

## REFERENCES

Chen, C. K. (2003), "A study of survey and analysis on hydraulic embankment and holes, as well as establishment of database," Doctorate Thesis, Institute of Civil Engineering, National Cheng Kung University.

Davis, J.L., and Annan, A.P. (1989), "Ground-penetrating radar for high-resolution mapping of soil and rock stratigraphy," Geophysical Prospecting, 37, 531-551.

Kovas, J. E. (1991), "Survey application of ground-penetrating radar," Surveying and Land Information Systems, Vol. 51, No. 3, pp.144-148.

Lee, T. H., Lin, H. M., Lo, C. S., and Wang, Y. T. (1999), "GPR application for testing parallel piping and underground holes," 8th Geotechnical Engineering Journal, pp. 2257-2270.

Lee, K. F., Liang, S. C., Wu, J. C., and Huang K. C. (2003), "Case discussion of applying GPR data interpretation on surveying underground cavities," Annual meeting and Academic Seminar of Geological Society of China, pp. 89-94.

Mellett, J. S. (1992), "Location of Human Remains with Ground-Penetration Radar," Geological Survey of Finland, Special Paper l6, pp. 359-365.

Tung, L. T., and Huang, Y. T. (1994), "GPR test on the structure of shallow stratum," Special Publication of Central Geological Survey, No. 8, pp. 137-143.

Tung, L. T., Chen, W. S., and Chen, T. J. (2002), "Survey of underground structure and objects," Special Publication, Industrial Technology Research Institute of Taiwan, R.O.C.

Wu, W. T., and Chang, J. K. (2007), "A study of GPR application on road base testing," Journal of Advanced Engineering, Vol. 2, No. 4, pp. 225-231.

Zolotarey, V.P., Grigorieff, K.N., and Glotov, V.P. (1996), "Detection of cavities in dolomite and profiling of alluvial deposits using GPR in Lithuania," 6th International Conference on Ground Penetrating Radar, 445 -453.